


# TARALAY PREMIUM DRY-TEX™

gerflor.com

PATENTED SYSTEM  
ONLY BY GERFLOR

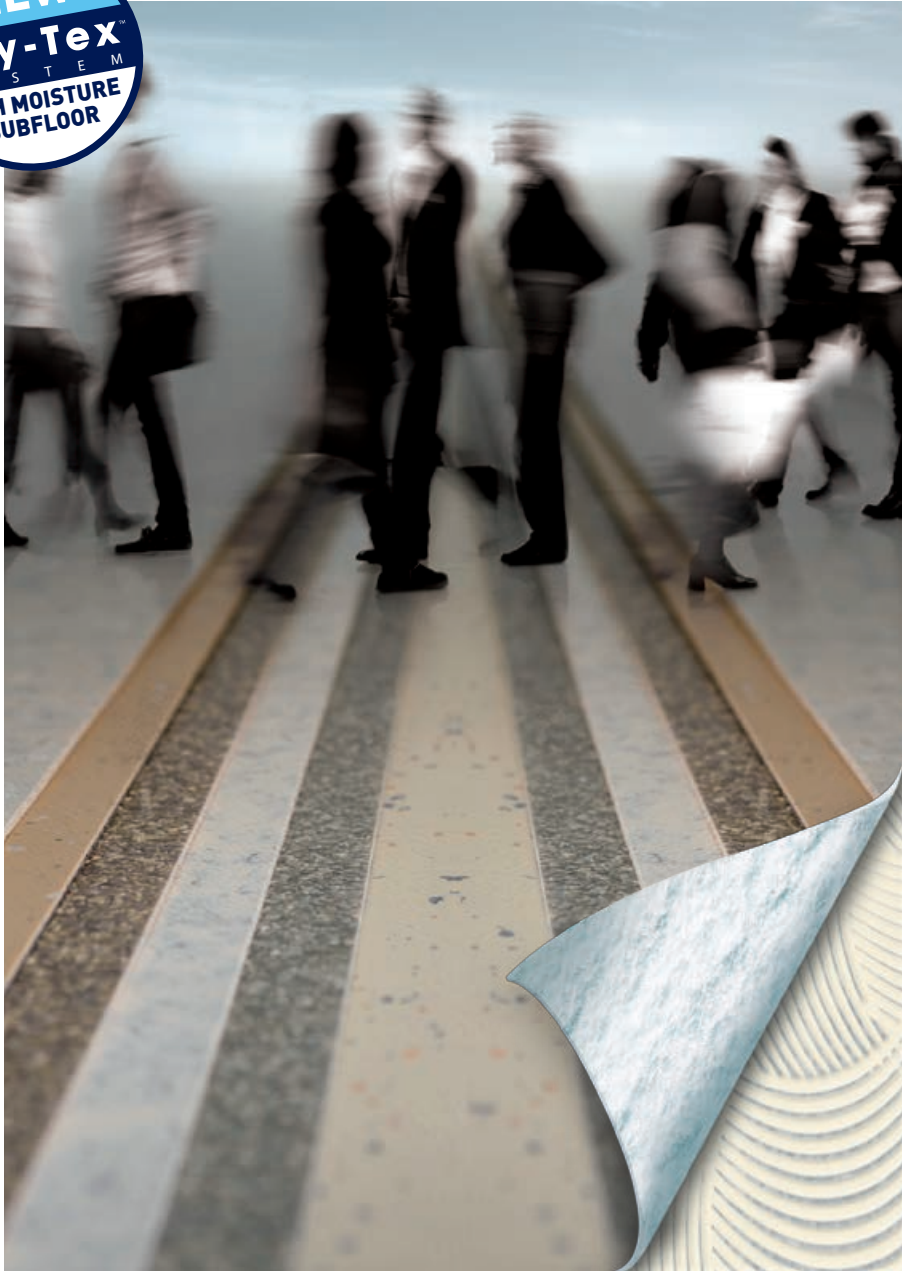

**Gerflor**  
theflooringgroup

# ROLL SOLUTION:

## ► SUITABLE FOR HIGH MOISTURE SUBFLOORS



### EMERGENCY DEPARTMENTS:

- Reception areas
- Waiting rooms
- Corridors




TARALAY PREMIUM DRY-TEX™  
is the **best alternative**  
to the installation of  
an interposition  
barrier which ensures:

# A UNIQUE FULL-SPREAD ADHESIVE & COVERING SOLUTION

Eliminates the installation of an interposition barrier to prevent rising damp  
(interposition underlayer, Resin, Separate slab)

## MOISTURE CONTENT OF CONCRETE SLAB

Proven resistance up to 98% RH / 15 lbs moisture according to ASTM F2170 & ASTM F1869

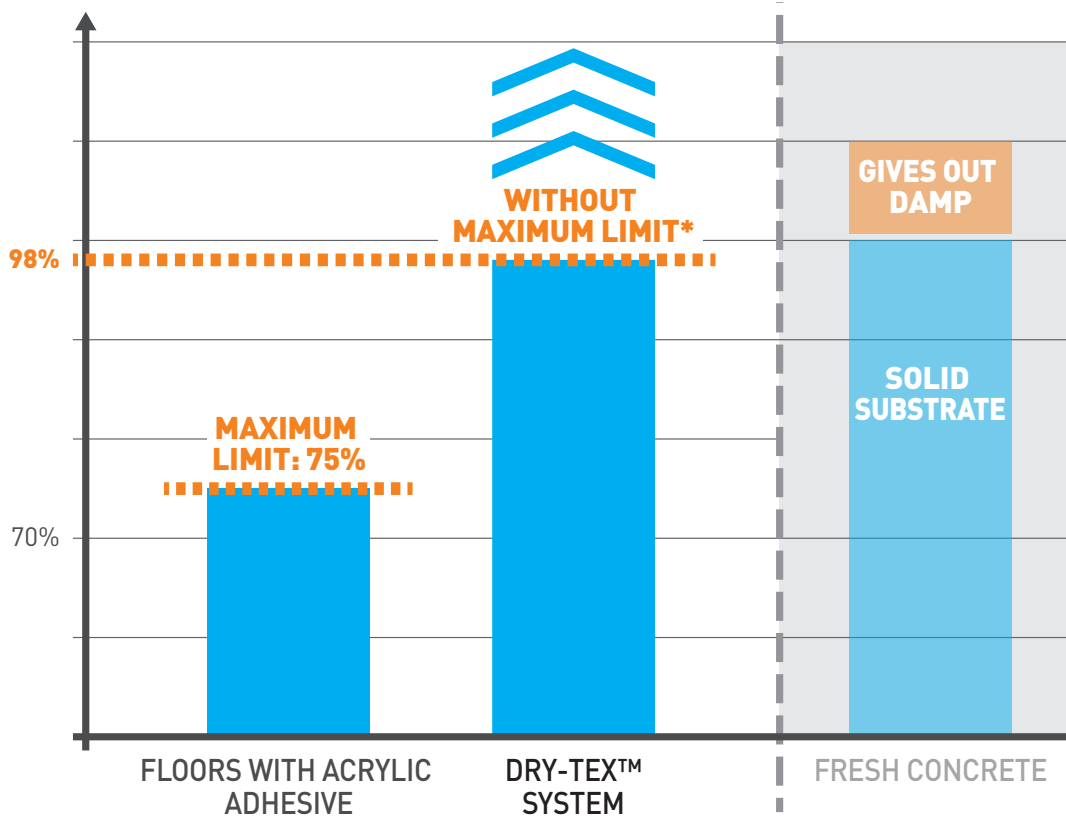

\*The substrate must not give out moisture.

### Financial savings: up to 25% cheaper!

- ✓ Reduced labour and material cost

### Time savings: a few minutes instead of several weeks!

- ✓ Reduced screed drying
- ✓ Reduced substrate preparation
- ✓ Easy installation

### Performance


- ✓ Excellent moisture resistance
- ✓ Resistance to heavy traffic

### Comfort and safety

- ✓ Easy rolling of beds and stretchers
- ✓ Slip resistance
- ✓ Acoustic insulation (compared to ceramic tiles)

# TARALAY PREMIUM DRY-TEX™

**PATENTED SYSTEM  
ONLY BY GERFLOR**

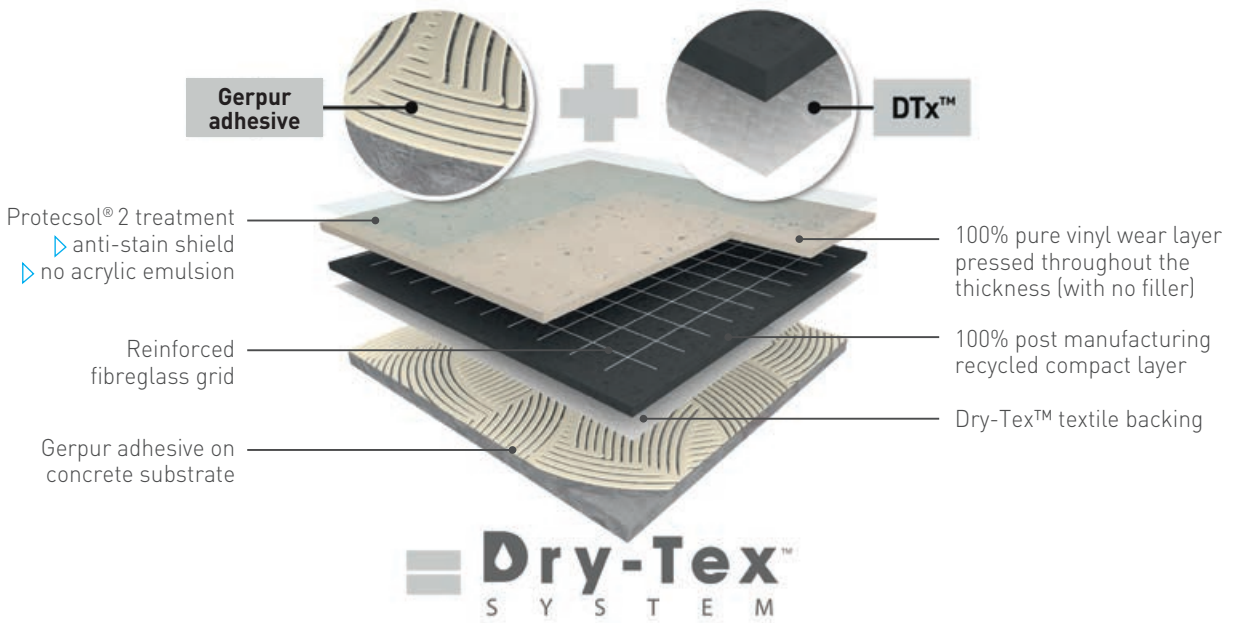

## ONE-STEP, FULL-SPREAD ADHESIVE INSTALLATION


The only moisture mitigation system integrated in the backing of the flooring

IDEAL SOLUTION FOR  
CONCRETE SLABS:

- ▷ RENOVATION AND NEW CONSTRUCTION
- ▷ SLAB-ON-GROUND AND DEEP CRAWL SPACE


A continuous adhesive film is absorbed by the non-woven backing.

The adhesive sticks completely to the concrete slab, regardless of the humidity level.

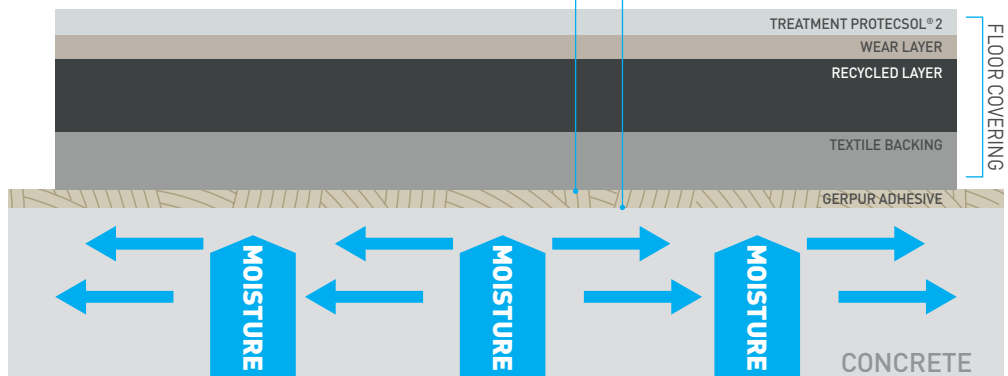


# ALL PREMIUM'S PERFORMANCES


## INDIANA\* Compact




4343 Tokelau



8053 Anambas




4004 Pago




4003 Tao


*\*All Taralay Premium Compact designs are available as Taralay Premium Dry-Text™ for a minimum order quantity of 2400 sqm*

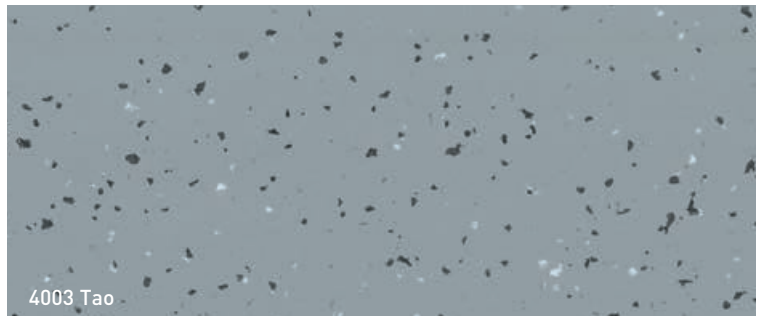


4003 Tao

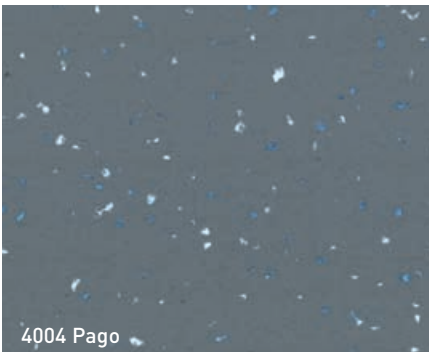

4004 Pago

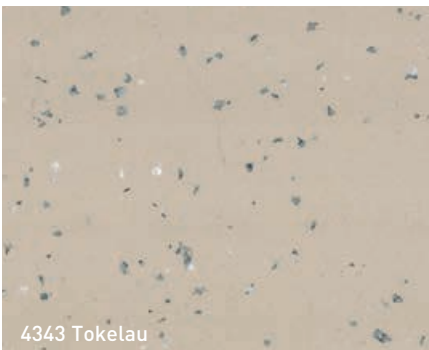

4343 Tokelau

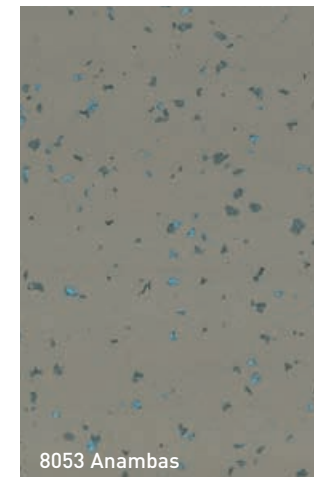

8053 Anambas

# THE SOLUTION FOR EXTREME TRAFFIC AREAS:

- ▶ Outstanding durability:  
extreme traffic resistance
  - Pure pressed vinyl floorcovering with no filler and no transparent wear layer for an outstanding abrasion resistance (Group T)
  - A 1mm thick pure vinyl wear layer for the best scratch and soiling resistance.
- ▶ Long lasting aspect:
  - Design within the whole thickness
  - Pure vinyl wear layer incorporating very densely pressed coloured chips
- ▶ Easy rolling of heavy loads:
  - Very good stability and very high indentation / acoustic performances
- ▶  **PROTECSOL<sup>®</sup> 2** surface treatment:
  - Easy maintenance & matt effect
  - No need of acrylic emulsion (metallisation)
  - Stain resistance against chemical products
- ▶ Dimensional stability:
  - Glass fibre grid reinforcement
- ▶ Eco-responsible solution
  - Excellent indoor air quality:  
TVOC after 28 days < 10µg/m<sup>3</sup>
  - 100% controlled recycled materials



# TARALAY PREMIUM DRY-TEX™

**TARALAY PREMIUM DRY-TEX™ SYSTEM** includes TARALAY PREMIUM DRY-TEX™ and **GERPUR glue**.

This system provides a complete moisture mitigation in full-spread adhesive installation eliminating interposition barrier for any slab with high moisture (up to 98%RH).

**TARALAY PREMIUM DRY-TEX™** is a multi-layered calendared and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2m wide sheet.

The product comprises a **1mm thick homogeneous, pure vinyl wear layer incorporating very densely pressed coloured chips, with a matt finish and without transparent wearlayer.**

The product comprises a 100% post-manufacturing compact reinforced with a glass fiber grid and a non-woven backing. The product offers **8dB sound insulation, an indentation resistance of 0.06mm and eases heavy rolling loads.**

**TARALAY PREMIUM DRY-TEX™** is treated with **Protecsol®2**, a surface treatment obtained by UV laser crosslinking. This Protecsol®2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids stain of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40% of minerals and inexhaustible materials.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6).**

It is 100% recyclable.

## TARALAY PREMIUM DRY-TEX™

### DESCRIPTION

Total thickness	EN 428	mm	2.50
Thickness of wearlayer	EN 429	mm	1.02
Weight	EN 430	g/m²	2660
Width of sheet	EN 426	cm	200
Length of sheet	EN 426	ml	20

### CLASSIFICATION

Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance <sup>(1)</sup>	DIN 51 130	class	R10



### PERFORMANCES

Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	EN 649 / EN 651	group	T
Type Binder content	ISO 10582	type	I
Dimensional stability	EN 434	%	≤ 0.40
Impact sound insulation	EN ISO 717-2	dB	8
Residual indentation (requirement)	EN 433	mm	≤ 0.10
Residual indentation (value)	-	mm	0.03
Castor chair test (type W)	EN 425	-	OK
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	> 6
Surface treatment	-	-	<b>Protecsol®2</b>
Chemical product resistance <sup>(2)</sup>	EN 423	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) <sup>(3)</sup>	ISO 22196	-	> 99 % inhibits growth

### ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m³	< 10
Certification	-	-	Floorscore™

### CE MARKING

CE	EN 14041	
		

<sup>(1)</sup> For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

<sup>(2)</sup> Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

<sup>(3)</sup> The implementation of an effective cleaning regime is the most important defence against infection.

gerflor.com

ARCHITECTURE  
DECORATION  
SPORT  
TECHNOSPECIFIC

**ASIA:** Gerflor Asia

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorasia@gerflor.com

**AUSTRALIA/NEW ZEALAND:** Gerflor Australasia Pty. Ltd

Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119

e-mail: gerflor@gerflor.com.au

**AUSTRIA/SWITZERLAND:** Gerflor GmbH

Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218

e-mail: austria@gerflor.com - switzerland@gerflor.com

**BELGIUM/LUXEMBURG:** Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14

e-mail: gerflorbel@gerflor.com

**CANADA:** Gerflor International

Tel: +1 438 333 0752 - Fax: +1 438 380 5425

e-mail: gerflorcanada@gerflor.com

**CHINA:** Gerflor floorings (China) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorchina@gerflor.com

**FINLAND:** Gerflor Oy

Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152

e-mail: info@gerflor.fi

**FRANCE:** Gerflor - Service Express:

☎ N°Azur 0 810 569 569 ☎ N°Azur FAX 0 810 569 570

e-mail: contactfrance@gerflor.com

**GERMANY:** Gerflor Mipolam GmbH

Tel: +49 (0)22 41-25 30-0

e-mail: gerformipolam@gerflor.com

Kunden-Service

Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100

e-mail: kundenservice@gerflor.com

SAT Service und Anwendungstechnik

tel: +49 (0)22 41-25 30 555 - Fax: +49 (0)22 41-25 30 550

e-mail: technik@gerflor.com

**IRELAND:** Gerflor Ltd

Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759

e-mail: gerflorir@gerflor.com

**ITALY:** Gerflor S.p.A.

Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84

e-mail: gerfloritalia@gerflor.com

**LATIN AMERICA (Brazil):** Gerflor América Latina

Tel: +55 11 38 48 20 20

e-mail: gerflor@gerflor.com.br

**MIDDLE EAST:** Gerflor Middle East

Tel: +966 13 847 1779 - Fax: +966 13 847 1781

e-mail: info@gerflorme.com

**NETHERLANDS:** Gerflor Benelux

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89

e-mail: gerflornl@gerflor.com

**OTHER COUNTRIES:** Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

**POLAND:** Gerflor Polska Sp z o.o

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33

e-mail: info@gerflor.pl

**PORTUGAL:** Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44

e-mail: gerflorportugal@gerflor.com

**RUSSIA:** Gerflor zao

Tel./Fax: + 7 495 785 23 71

e-mail: gerflorussia@gerflor.ru

**SCANDINAVIA:** Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80

e-mail: gerflorscand@gerflor.no

**SPAIN:** Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85

e-mail: gerfloriberia@gerflor.com

**UNITED KINGDOM:** Gerflor Ltd

Sample service: Contractuk@gerflor.com

Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

**USA:** Gerflor North America

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753

e-mail: info@gerflorusa.com



Health & Safety



ISO 14001



Recycling



Life Cycle Analysis

Committed to sustainable development

**Gerflor.** Don't forget our complementary ranges!



Handrails



Wall Coverings  
& Protections



Entrance mats



Skirtings & Profiles

and *Be* CONNECTED!



www.gerflor.com

**Gerflor**<sup>®</sup>  
theflooringgroup